

# Aluminium Panel Mount PC: APM15 -Windows 7/ 10 (Intel 5<sup>th</sup> Generation Core™)


Mechanical Design




## Features:

- 21.5" LED LCD with Projective Capacitive multi-touch
- Intel 5th @ Generation Core TM i5-5200U 2.2GHz
- Fanless cooling system and Ultra-low power
- Front IP65 Water and Dust Proof
- Aluminum Housing and fanless design
- Room booking schedule; Access Control
- Room Information Display

**Real Flat Panel Mount  
(IP65 front side)**

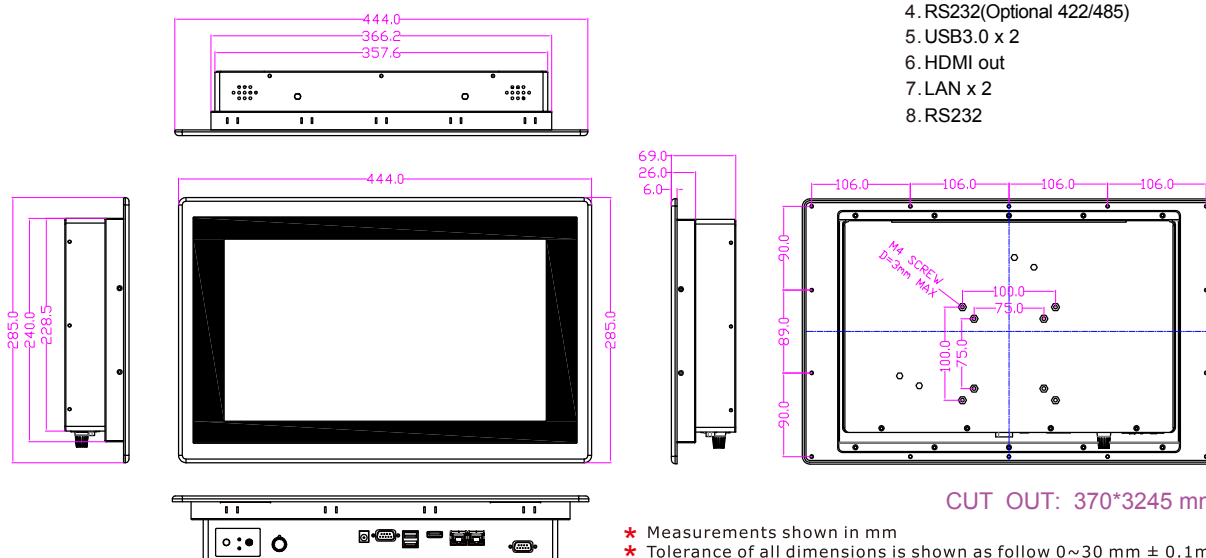

## Fully Integrated I/O

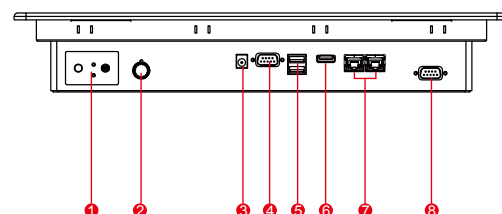

1. OSD Membrane
2. Brightness Adjustment Knob
3. 12V DC in
4. RS232(Optional 422/485)
5. USB3.0 x 2
6. HDMI out
7. LAN x 2
8. RS232

**CUT OUT: 370\*3245 mm**

- \* Measurements shown in mm
- \* Tolerance of all dimensions is shown as follow 0~30 mm ± 0.1mm, 30~50 mm ± 0.15 mm, 50~120 mm ± 0.2 mm, above 120 mm ± 0.25 mm
- \* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

## Specifications

### System :

- Processor : Intel Core i5-5200U Broadwell 2.2GHz (turbo to 2.7GHz)
- System Chipset : Intel® QM87 Chipset
- System Memory : 1 x DDR3L 1333/1600 SO-DIMM (Default 4GB Max 16GB)
- Storage : 64GB mSATA SSD
- LAN : Intel® Ethernet Controller I211-AT + Intel® Gigabit Ethernet PHY I218-LM
- Audio : Realtek ALC886 HD Audio Codec

### Input / Output :

- Serial Ports : 1 x RS232(Optional 422/485)  
1 x RS232
- USB Ports : 2 x USB 3.0
- Ethernet : 2 x RJ 45-10/100/1000 Mbps
- HDMI : 1 X HDMI

### Power Specifications :

- Power Input : 12V DC IN
- Power Consumption : 80W (Max backlight & High CPU load)

### Accessories

- External Adapter : 110~240V AC to 12V DC Power Adapter

### Panel Spec

- Size/Type : 15" TFT
- Resolutions : 1366 x 768
- Brightness : 300 cd/m<sup>2</sup> (typ.)
- Contrast Ratio : 500 : 1(typ.)
- Viewing Angle : -85~85(H); -80~80(V)
- Max. Colors : 16.7M
- Touch Screen : Projective Capacitive multi-touch

### Mechanical Specification :

- Cooling System : Fanless Design
- Mounting : VESA Mount (75x75mm,100x100mm)
- Dimension (W x H x D) : 444 x 285 x 69 (mm)
- Cut out Dimension : 370 x 245 (mm)

### Environment Considerations :

- Operating Temperature : 0 deg.C to 50deg.C
- Operating Humidity : 30% to 90% (non condensing)

### OS Support

- Window Embedded Std. 7
- Window 7 PRO for Embedded System
- Window Embedded 8.1 Industry Pro
- Windows 10 IoT Enterprise