

Rugged Panel PC: WPC15iQ

Product Features:

- » Ultra Low Power Intel® Bay Trail N2930 1.83GHz CPU Fanless Design
- » High Quality 15" Panel, 1024 x 768 resolution, 1000 nits
- » IP67 Dust/ Water proof design with VESA mount
- » Aluminum Die-Casting Housing with Anti-Corrosion Treatments
- » Build in ambient Light sensor
- » Wide Range 9 to 36V DC Input
- » 5 Wire Resistive Touch / Anti-Reflective Protection Glass (Optional)




Product Specifications:

Display	Model Name	WPC15iQ
	Size	15"
	Resolution (pixels)	1024 x 768
	Number of Colors	16.2M (8 bit) / 262K (6 bit)
	Brightness (cd/m ²)	1000
	Contrast Ratio	700:1
	Viewing Angle	-80~80 (H) ; -60~80 (V)
	Active Area	304.1 (H) x 228.1 (V)
	Touch (optional)	5 Wire Resistive
System	Processor	Intel® Bay Trail N2930 1.83GHz Processor
	Chipset	Bay Trail SoC Chipset
	BIOS	AMI 16Mbit Flash
	Memory	1 x SODIMM, Max 8GB DDR3L 1066
	Ethernet	Intel® WG82574L GbE LAN
	Storage	mSATA SSD
Input / Output	1 x LAN	
	2 x USB	
	1 x RS-232	
	1 x 9 ~36v DC-IN	
Environment	Operating Temperature	-25 ~55°C
	Storage Temperature	-30 ~70°C
	Humidity	10 ~ 95% non-condensing
	Shock	Compliance with MIL810F/EN50155
	Vibration	Compliance with MIL810F/EN50155
	EMC	CE, FCC ClassB, Compliance with EN50155
	Safety	Compliance with EN50155, MIL-STD 810F
Driver OS Support	Windows 7 Emb. or Pro / Windows 8 Emb. or Pro / Windows 10 IoT-E (Pro)	
Mechanical	Dimension (W x H x D)	398 x 308 x 58 mm, Weight 4.7 Kgs
Product Optional Items	Mounting bracket	One robust bracket with locking handle (Can adjust from -5 deg. to 90 deg.)
Packing List	(IB32) SBC Manual & Driver CD	




I / O View:

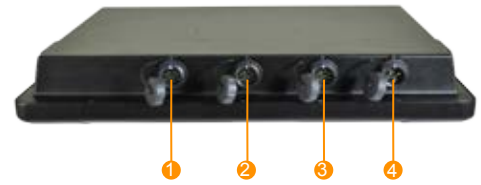


1. LAN
2. USB
3. RS-232
4. 9 ~ 36V DC-in

Front OSD Control Function:

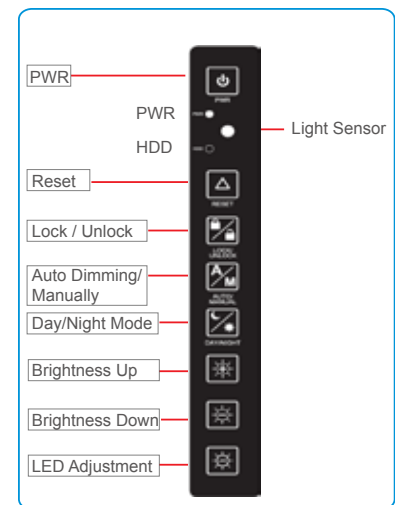

Drawing w / Mounting bracket:

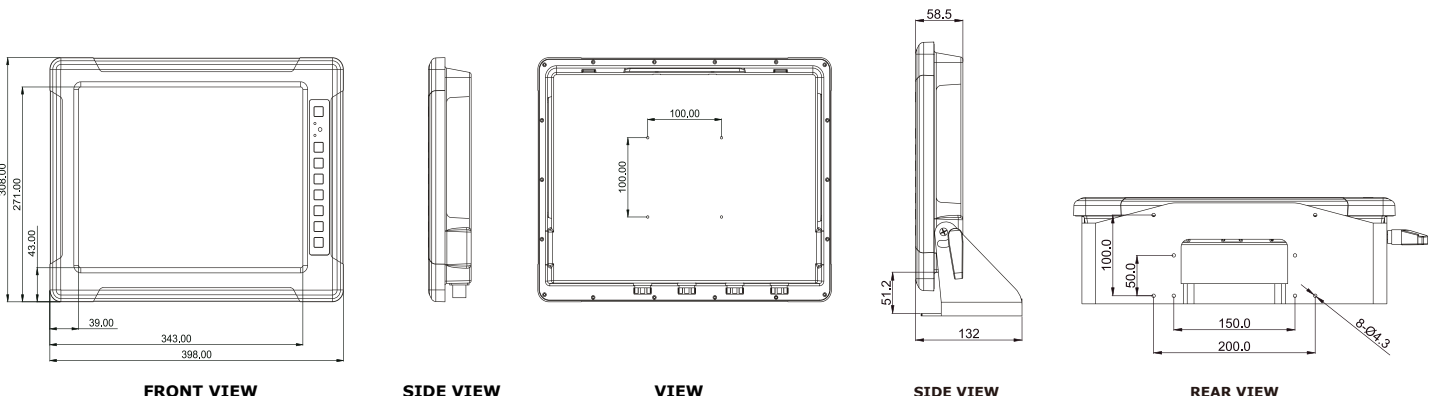

WETIF Industrie EDV
Senserstraße 3
D - 82140 Olching

Telefon DE +49 8142 448976-1
Telefax DE +49 8142 448976-4
Internet www.WETIF.com

Telefon AT +43 664 2868223
Telefax AT +43 662 998799411
eMail info@wetif.com