

# Stainless Steel Sunlight PC: SRK 21/ 24

11<sup>th</sup> Gen 21.5", 24": 6 Sides Full IP65 Stainless Touch IPC



## Features

- Fanless and rugged design
- 11<sup>th</sup> Gen Intel® Core™ Celeron 6305E / i3 1115G4E / i5 1145G7E / i7 1185G7E processors
- Resolution 1920 x 1080 dpi
- True Flat PCT touch solution
- Full 304 IP65 6 sides stainless chassis
- All IP65 M12 waterproof connectors
- 2 x USB, 2 x RS232, 2 x GLAN
- VESA mount & Yoke mount



## Specifications

Model No.	SRK21	SRK24
<b>System</b>		
<b>CPU</b>	11 <sup>th</sup> Gen Intel® Core™ Celeron 6305E / i3 1115G4E / i5 1145G7E / i7 1185G7E processors	
<b>Memory</b>	2 x 260-pin DDR4 3200MHz SODIMM up to 64 GB	
<b>H/W Monitor</b>		
<b>H/W Monitor</b>	Watch Dog Timer 256 Level	
<b>TPM</b>		
<b>Controller</b>	Infineon SLB9670VQ2.0	
<b>I/O Ports</b>		
<b>RS232</b>	2	
<b>GLAN</b>	2	
<b>USB</b>	2	
<b>Storage</b>		
<b>Storage</b>	1 x SATA 3.0	
<b>Expansion</b>		
<b>M.2</b>	1 x M.2 M key (PCI e Gen x 4 NVMe) 2280 1 x M2 B Key ( PCI e x 1 , USB 2.0 w/NANO SIM Holder SATA 3.0) 2242/3042 1 x M.2 E key (PCI e x 1, USB 2.0) 2230	
<b>Power Requirement</b>		
<b>Power Requirement</b>	DC in 12 ~ 24V ( OCP & OVP)	
<b>Touch Screen</b>		
<b>Touch Screen</b>	True Flat PCT	
<b>OS support</b>		
<b>OS support</b>	Win Pro 11 / Window 10 IoT / Linux Kernel 5.4 Ubuntu LTS	
<b>Display</b>		
<b>Size</b>	21.5" TFT (16:9)	24" TFT (16:9)
<b>Resolution</b>	1920 x 1080	1920 x 1080
<b>Colors</b>	16.7M	16.7M
<b>Luminance</b>	300 cd/m <sup>2</sup>	250 cd/m <sup>2</sup>
<b>Contrast Ratio</b>	3000:1	1000:1
<b>View Angle (H/V)</b>	178°/178°	176°/170°

## Mechanical & Environmental


Heatsink	Back side	
I/O ports	Back side	
Operation Temp.	0 ~ 45°C	
Storage Humidity	10 ~ 90%, non-condensing	
Mount	VESA mount (100X100mm) & Yoke mount	
Dimension (WxHxD)	607 x 400 x 73 mm	620 x 570 x 65 mm
Weight	TBD	TBD

## Optional

	External antenna ( WIFI)	
	5GB LTE module	
	Full IP65 Waterproof Power adaptor with European power cord ( 132W / 90 ~ 295V AC input / 12V DC output)	
	Full IP65 Waterproof Power adaptor with European power cord (150W / 90 ~ 295V AC input / 24V DC output)	
	Optical Bonding	
	HDMI port	
	RFID Reader RS232 interface (13.56 MHz standard and 125KHz, Up to 50 mm at 5V ~ 18V)	

Optional HB Panel	IP215P103/104/105/106J	IP240P103/104/105/106J
Resolution	1920 x 1080	1920 x 1080
Color	16.7M	16.7M
Luminance	1000 cd/m <sup>2</sup>	1000 cd/m <sup>2</sup>
Contrast Ratio	3000:1	1000:1
Viewing Angle (H/V)	178°/178°	173°/165°

## Dimension SRK21

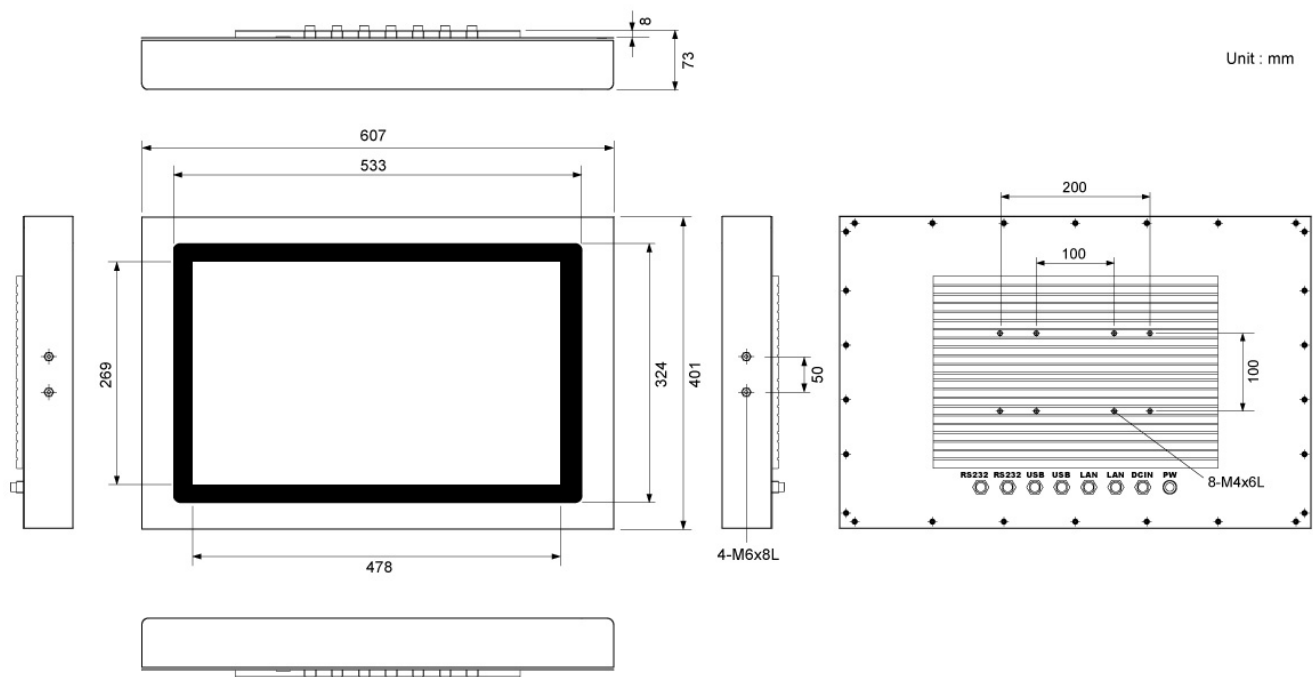

Technische Änderungen und Irrtum ohne Vorankündigung vorbehalten! Alle Rechte geschützt!

**WETIF**  
industrie edv

WETIF Industrie EDV  
Senserstrasse 3  
D - 82140 Olching

Telefon +49 8142 448976-0  
Telefax +49 8142 448976-4  
Mobil +49 172 817 44 11

InfoTel +49 8142 448976-3  
Email [info@wetif.com](mailto:info@wetif.com)  
Internet [www.wetif.com](http://www.wetif.com)