

10.4" Rugged Tablet PC: IA810i

Product Features:

- 5th gen. Intel Core i5-5250U Broadwell, 1.60 GHz (turbo up to 2.70 GHz)
- Intel HD Graphics 4400
- 10.4" high quality 1024x768 resolution TFT-LCD panel
- Visible Light Transflexion touch for enhanced visibility under sunlight
- Al-Mg alloy housing with rubber Protectors for MIL-810G shock, vibration and drop standard
- Trusted Platform Module (TPM) V1.2
- built-in Wireless / Bluetooth / GPS
- optional 3G or 4G module
- Lithium-Ion battery pack, 6 cells 5200 mAh
- low power consumption CPU only 15 W
- optional adjustable Kickstand that converts to a handle



optional kickstand


Product Specifications:



System Specification	Processor	5th gen. Intel Core i5-5250U Broadwell, 1.60 GHz (turbo up to 2.70 GHz)
	System Memory	4 GB SODIMM DDR3L-1600, (max. 8 GB)
	Storage	64 GB mSATA MLC SSD, (max. 512 GB)
	Operating System	64-bit, either: Windows 10 IoT Ent. / 8.1 Industry Pro / 7 Pro for Embedded Systems / 7 Embedded Standard
Display Specification	Size / Technology	10.4"
	Resolution	1024 x 768
	Brightness	700 nits
	Touch	4-wire resistive
Wireless Communication	WLAN	802.11a/b/g/n
	Bluetooth	Bluetooth 4.0 Class I
	GPS	u-Blox Neo-6Q
	WWAN	optional 4G (LTE,HSPA+,GSM/GPRS/EDGE,EV-DO Rev A, 1xRTT) or optional 3G (HSPA+,GSM/GPRS/EDGE)
System I/O Buttons Indicators Sensors Security	Audio	built-in 1 W Speaker
	External I/O	2 x USB3.0, 1 x Audio combo (Mic-in or Line-out), 1 x SD card slot, 1 x SIM card slot, 1 x power jack, 1 x RS232/422/485 (set by jumper), 1 x RJ-45
	Buttons	1 x power, 1 x menu, 3 x function key, 2 x brightness control
	LED Indicators	power, battery, HDD, RF
	Sensors	light sensor
Data Capture	Camera	optional 2 MP camera at front / optional 5 MP auto-focus camera at rear
	Barcode	optional 1D/2D barcode scanner
Mechanical and Environment	Dimension (W x L x H)	266 x 220 x 51 mm
	Weight	2.39 kg
	Operating Temperature	-20 to +60 °C (AC operation), -10 to +50 °C (battery operation)
	Operating Humidity	10 to 90 % RH, non-condensing
	IP Proof	IP54 (optional IP65 available)
	Shock	MIL-STD-810G method 516.6 procedure I
	Vibration	MIL-STD-810G method 514.6 procedure I
	Drop	MIL-STD-810G method 516.6, 4 ft to concrete
	Certifications	CE, FCC
Power Management	Power Input	19 V DC
	Battery	11.1 V, 5200 mAh Lithium-Ion Battery (6 cells)
	Battery Operating Time	up to 8 hours
	Adapter	100 to 240 V AC, 50 to 60 Hz / 19 V DC output

Dimensions :

Note: this is a simplified drawing and some components are not marked in detail.

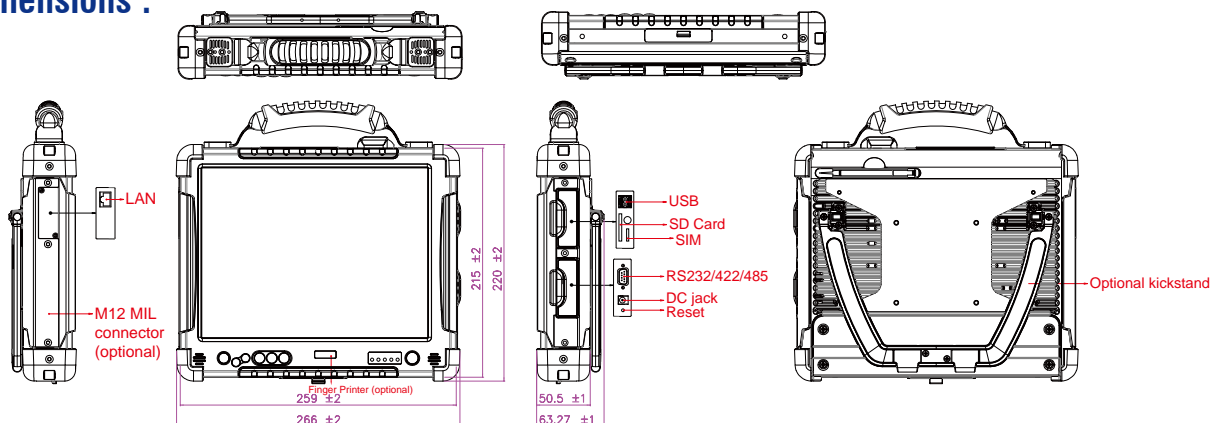

Technische Änderungen und Irrtum ohne Vorankündigung vorbehalten! Alle Rechte geschützt!