


Android Rugged Tablet PC TB122C mit 12.2"

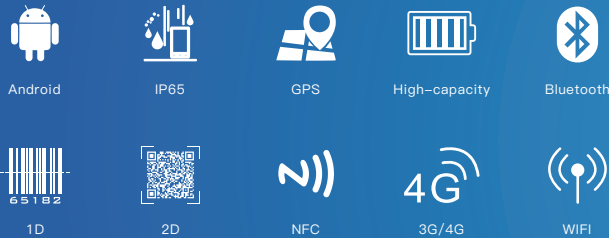

Functions

- Support for Android 10 system
- Optional 3G/4G all network communication, WiFi, Bluetooth and other communication modes
- 12600mAh battery, 6–8 hours of machine endurance
- IP65 high protection level, in accordance with MIL–STD–810G
- Support GPS, Glonass, more accurate positioning
- Support 1920x1200 high score screen, optional with Corning gorilla TP
- Support 1D/2D, NFC and other functional modules for free selection

Product Six Views



Specification Parameter

Basic parameters	
Dimension	319.6 x 216 x 23.4mm
Weight	device unit 1500g
Device Color	black
LCD	12.2 inch IPS 16:10, 1920*1200
Touch Panel	10points Capacitive, G+G, Corning Gorilla Glass
Camera	Front 5.0MP Rear 13.0MP
I/O	Type C x 1, USB 2.0 x 2, USB 3.0 x 1, SIM Card x 1, TF Card x 1, HDMI 1.4a x 1, 12pins Pogo Pin x 1, RS232 x 1, RS485 x 1, RJ45 (10/100M) x 1, Φ3.5mm standard earphone jack x 1, Φ3.5mm DC jack x 1
Power	AC100V ~ 240V, 50Hz/60Hz output DC 5V/3A
GPS	Support GPS+Glonass, Optional Beidou

Optional modules	
NFC	Support 14443A protocol under ISO/IEC, reading distance: 3-5cm
1D	MOTO SE655E100R, Optical Position: 5mil, Scan speed: 50 times/s
2D	Honeywell N3680, Optical Position: 5mil, Scan speed: 50 times/s

Optional Accessories



Docking Charger



Removable Battery



Hand-strap



Back-strap



Removable Keyboard



Vehicle Mount

Application Range

Various modules and accessories can be selected to meet customers' application in various industries.



Outdoor Exploration



Military Equipment



Finance



Animal Husbandry

Performance parameter	
CPU	Qualcomm(OCTA Core), 2.0GHz
OS	Android 10
RAM	4GB
ROM	64GB

Battery	
Capacity	3.7V/12600mAh
Type	Li_polyment, removeable battery
Endurance	8hrs(default 50% volumn, default 200 lumens brightness, play 1080P HD video)

Network connections	
WIFI	2.4G+5.8G dual frequency, WIFI 802.11(a/b/g/n/ac)
Bluetooth	BT4.2 (BLE) class1 transmission distance: 10m
3G/4G (Optional)	EU EDITION TDD-LTE: B38/40/41 FDD-LTE: B1/3/5/7/8/20 WCDMA:B1/B5/B8 GMS:B5/3/8

Reliability	
Operate Temperature	-20 °C ~ 60 °C
Store Temperature	-30 °C ~ 70 °C
Humidity	95% Non-Condensing
IP Grade	IP65

Technische Änderungen und Irrtum ohne Vorankündigung vorbehalten! Alle Rechte geschützt!



WETIF Industrie EDV
Senserstrasse 3
D - 82140 Olching

Telefon +49 8142 448976-0
Telefax +49 8142 448976-4
Mobil +49 172 817 44 11

InfoTel +49 8142 448976-3
Email info@wetif.com
Internet www.wetif.com